


# Golfsmith TLP Grip Modifier Tool

Stock #292365



The Tour Lock Pro Grip Modifier will allow the use of the Tour Lock Weights in virtually any grip. Install the Tour Lock Pro Grip Modifier into any drill and let it do the work. A precision cut hole in the end of the grip cap will result and allow the insertion of the Tour Lock Weights.

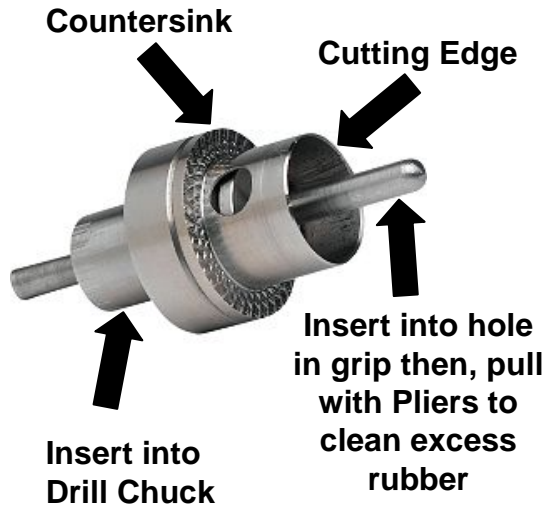

- 1) Always use a vice to hold the club.
- 2) With the TLP Modifier firmly tightened in the drill, insert the TLP Modifier into the hole in the grip.
- 3) Drill slowly to cut the hole and increase the speed to grind the countersink.
- 4) To extract the rubber piece, pull the extraction bar with a pair of pliers or vice grips. Caution: it will be hot.
- 5) Once the hole is drilled make sure the inside of the shaft is clean, dry and clear of debris.
- 6) Insert Tour Lock Grip weight, tighten and hit away.
- 7) Tour Lock weights may be installed on any club including putters.
- 8) CAUTION: Grip Modifier Tool will get HOT!

Tour Lock Weights



Tighten with 3/16" Allen Wrench



Insert Tour Lock Grip weight, tighten

**Golfsmith**

11000 N. IH-35, Austin, Texas 78753  
(512) 837-4810 www.golfsmith.com